

806-960 MHz 3dB Gain

High Performance: 3dB gain is achieved in this premium antenna featuring a 5/8 wave over 1/4 wave design.

Stylish and Durable: These antennas are manufactured using the finest corrosion resistant materials and finishes available.

Reliable: The ABS base has an ultrasonically welded brass insert and a gold plated spring loaded contact for long term reliability.

Standard Mounting: These antennas mate with a standard TAD/NMO type mount, providing an excellent moisture seal even when the antenna is removed.

Note:

All classic series antennas are available for a K166 type mount. This option can be ordered by adding an "S" to the part number after the "A" prefix.

Example: AS1183A

A2183A, B

An integrated magnet mount version of this antenna is also available. It features a powerful magnetic base with a protective mylar to prevent damage to any mounting service. It is supplied with 12 feet of RG58U coax and choice of either MINI-UHF or TNC connector.


ELECTRICAL SPECIFICATIONS:

FREQUENCY RANGE: 806-960MHz
GAIN: 3dB
VSWR: <2:1
IMPEDANCE: 50 ohms
POWER RATING: 200 watts

MECHANICAL SPECIFICATIONS:

RADIATOR: Stainless steel
BASE: ABS, Ultrasonic brass insert
CONTACT: Gold plated spring loaded contact
LENGTH: 14" at lowest frequency
MOUNTING: Standard TAD/NMO type
FINISH: Brite or Black

CLASSIC MOBILE ANTENNA

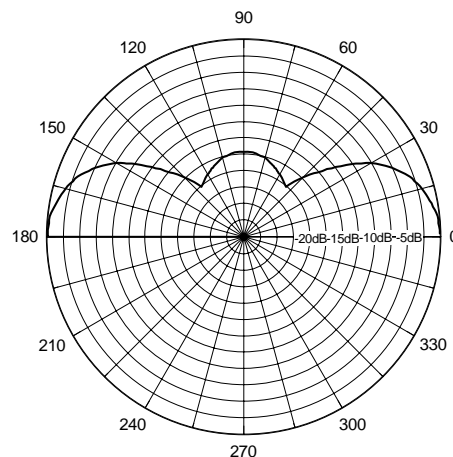

A1183 Permanent Mount

A2183 Magnet Mount

FREQUENCY	BRITE	BLACK	BRITE	BLACK
806-866MHz	A1183A-06	A1183B-06	A2183A-06	A2183B-06
825-896MHz	A1183A-24	A1183B-24	A2183A-24	A2183B-24
896-960MHz	A1183A-96	A1183B-96	A2183A-96	A2183B-96