

COMTELCO

Technical Specification

A4671B, W

746-796 MHz

LOW PROFILE MOBILE ANTENNA

Performance: These antennas provide unity gain in a design for heavy duty service. They have a power handling capacity of 150 watts.


Stylish and Durable: These antennas are manufactured using the finest materials and finishes available. The covers are molded using UV inhibited ABS plastic and are available in black or white finishes.

Reliable: The Chrome plated Brass base has a gold plated spring loaded contact.

Standard Mounting: These antennas mate with the standard TAD/NMO type mount, providing an excellent moisture seal even when the antenna is removed.



Vertical Pattern

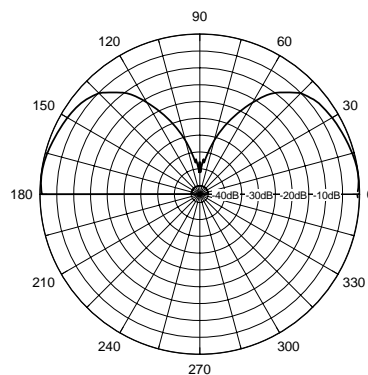

SPECIFICATIONS:

FREQUENCY RANGE:	746-796MHz
GAIN:	Unity
IMPEDANCE:	50 ohms
POWER RATING:	150 watts
VSWR:	<2.0:1
RADOME:	UV ABS
BASE:	Chrome plated brass
CONTACT:	Gold plated spring loaded contact
HEIGHT:	2 5/8"
DIAMETER:	1.5"
MOUNTING:	Standard TAD/NMO type
COLOR:	White or Black