

# COMTELCO

## Technical Specification

A1132414B

1200-1600 /2400-2800 MHz

DUAL BAND MOBILE ANTENNA

**Performance:** Ultra Wide, Dual Band antenna for the 1200-1600MHz and 2400-2800MHz bands providing unity gain on both bands.


**Stylish and Durable:** These antennas are manufactured using the finest corrosion resistant materials and finishes available. They provide great performance in a small stylish black chrome package.

**Reliable:** The ABS base has an ultrasonically welded brass insert and a gold plated spring loaded contact for long term reliability.

**Standard Mounting:** These antennas mate with a standard TAD/NMO type mount, providing an excellent moisture seal even when the antenna is removed



### Vertical Pattern

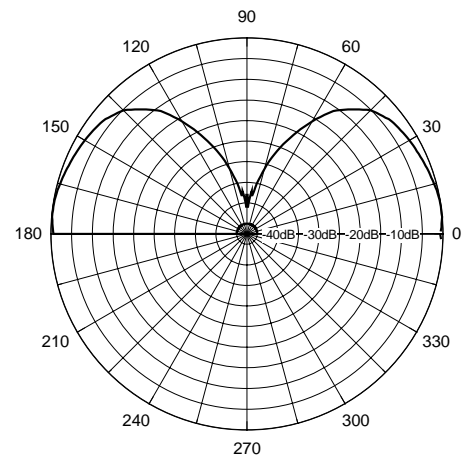

### SPECIFICATIONS:

<b>FREQUENCY RANGE:</b>	1200-1600MHz 2400-2800MHz
<b>GAIN:</b>	Unity (2.1dBi)
<b>VSWR:</b>	<2:1
<b>IMPEDANCE:</b>	50 ohms
<b>POWER RATING:</b>	200 watts
<b>RADIATOR:</b>	Polyester coated Brass
<b>BASE:</b>	ABS, Ultrasonic brass insert
<b>CONTACT:</b>	Gold plated spring loaded contact
<b>LENGTH:</b>	2 1/8"
<b>MOUNTING:</b>	Standard TAD/NMO type
<b>FINISH:</b>	Black